



Excellence in Screenchangers

AP SERIES

AP[®]SERIES - SELF-CLEANING CONTINUOUS FLOW SCREENCHANGER

AP IS SELF-CLEANING



Thanks to an exclusive Cofit patent the filter cartridges get cleaned without being taken out of the block.

AP IS CONTINUOUS

The filtering cartridges can be cleaned and replaced without having to interrupt production.

AP IS ECONOMICAL

It doesn't need an expensive control panel or an hydraulic unit.
Its maintenance and spare parts are reduced to the minimum.

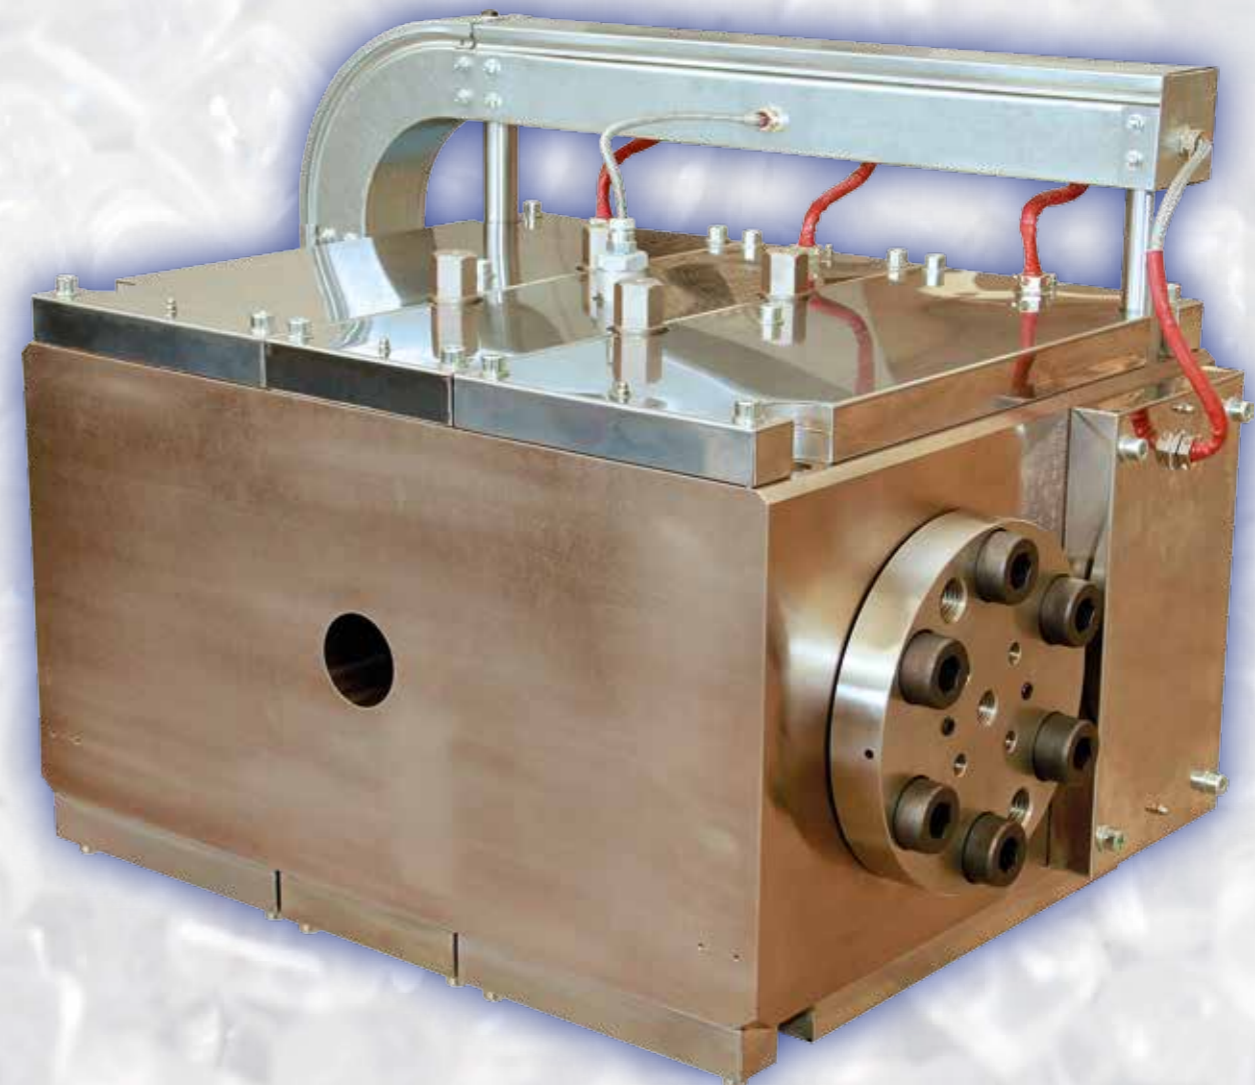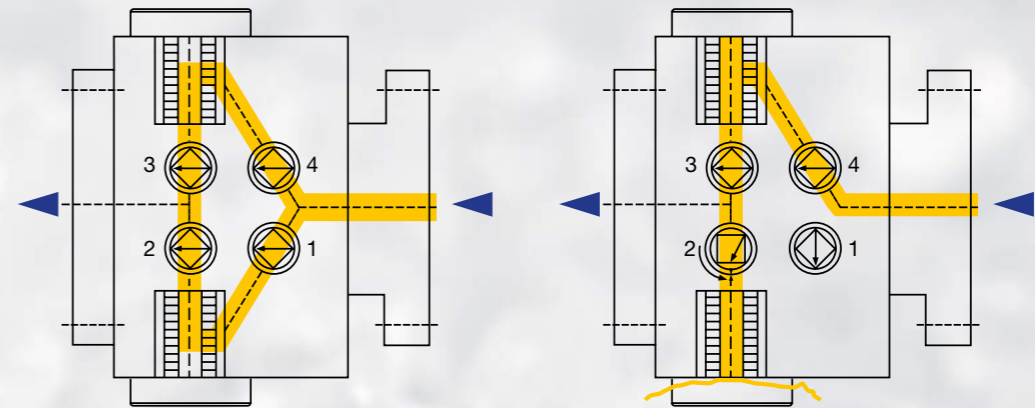

TECHNICAL DATA:

Processing: Continuous flow - SELF-CLEANING

Type of material: Steel

Diameter of filtering unit: Up to 945 cm²

Heaters: Hardened

Filtering area: Up to 600 cm² (93 square inches)

Material status: Very suitable for moderately contaminated materials

Operating temperature: Up to 300°C (572° F)

Pressure: Up to 400 bar (5.800 psi)

Hourly capacity: Up to 1.000 kg/h (2.200 pounds)

Machined product: PE, PP, ABS, PET, PS, etc.

Applications: Film, Sheet, mono filaments, Pipe, Tubing and more

Cofit International S.r.l.
Via J.F. Kennedy 9
20023 Cerro Maggiore (MI) - Italy
info@cofit.com
Phone +39 0331 93551
Fax +39 0331 935591

www.cofit.com

PA SERIES