





**CORPO FEMMINA / FEMALE BODY**

| Ref. | F   | Val.ten.<br>Closure Valve | CH1 | P   | L    | E    |
|------|-----|---------------------------|-----|-----|------|------|
| 501V | 1/8 | OK                        | 16  | 7.0 | 45.0 | 19.0 |
| 401V | 1/4 | OK                        | 21  | 8.0 | 56.0 | 25.0 |
| 503V | 1/8 | no                        | 16  | 7.0 | 45.0 | 19.0 |
| 403V | 1/4 | no                        | 21  | 8.0 | 56.0 | 25.0 |




**INNESTO MASCHIO / MALEPLUG**

| Ref. | F   | CH1 | P   | L    | E    | O-Ring-<br>VITON® |
|------|-----|-----|-----|------|------|-------------------|
| 511  | 1/8 | 13  | 6.0 | 28.5 | 15.0 | 2031              |
| 411  | 1/4 | 14  | 8.0 | 37.0 | 18.0 | 2043              |




**CORPO FEMMINA / FEMALE BODY**

| Ref. | F   | CH1 | P   | L    | E  |
|------|-----|-----|-----|------|----|
| 512  | 1/8 | 12  | 7.0 | 28.0 | 14 |
| 412  | 1/4 | 14  | 8.0 | 37.5 | 17 |




**PROLUNGHE / EXTENSIONS**

| Ref. | F   | CH1 | P   | L     | P1 |
|------|-----|-----|-----|-------|----|
| 550  | 1/8 | 14  | 7.0 | 50.0  | 6  |
| 551  | 1/8 | 14  | 7.0 | 100.0 | 6  |
| 450  | 1/4 | 17  | 8.0 | 50.0  | 8  |
| 451  | 1/4 | 17  | 8.0 | 100.0 | 8  |

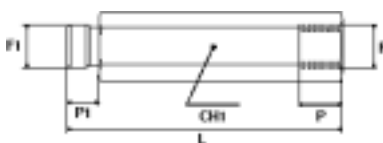

**PORTAGOMMA CILINDRICO / HOSE CONNECTION**

| Ref.        | F  | F   | CH1 | P   | L    | O-Ring      |
|-------------|----|-----|-----|-----|------|-------------|
| A19-2153001 | 7  | 1/8 | 15  | 6.0 | 31.0 | 2031 VITON® |
| A19-2153002 | 7  | 1/4 | 18  | 8.0 | 33.0 | 2043 VITON® |
| A19-2153004 | 9  | 1/8 | 15  | 6.0 | 31.0 | 2031 VITON® |
| A19-2153005 | 9  | 1/4 | 18  | 8.0 | 33.0 | 2043 VITON® |
| A19-2153007 | 12 | 1/4 | 18  | 8.0 | 33.0 | 2043 VITON® |

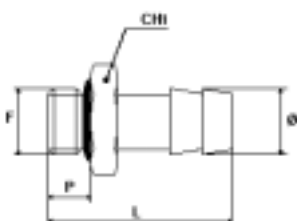

**INNESTI RAPIDI PER STAMPI SERIE "IRD"**

L'innesto rapido per stampi è stato realizzato per rendere più rapida, e nello stesso tempo semplificare, l'operazione di sostituzione dello stampo nelle presse ad iniezione.

L'aggancio degli innesti rapidi IRD è garantito da sfere e molle in acciaio inox AISI 304 e da guarnizioni di tenuta in VITON che garantiscono sempre ed a qualsiasi temperatura una chiusura perfetta.

**"IRD Series" - QUICK COUPLING CONNECTORS FOR MOULDS**

Quick coupling connectors make easy and fast mould changing.

Using the fast coupling IRD series on each mould considerably reduces the downtime normally associated with tool changes, because each mould can be connected and disconnected in short time.

The IRD fast couplings are safe and sealed. The connection between the female and male in particular is guaranteed by the balls and spring in stainless steel AISI 304 with VITON seals that ensure a perfect closure at every temperature.

